


TWO BOLT FLANGE UNITS

SBFL LIGHT DUTY SET SCREW LOCKING TYPE

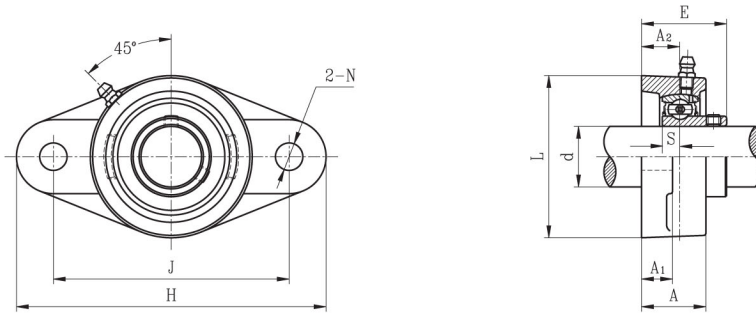

- Cast iron housing
- Narrow inner ring bearing

Unit No.	Shaft Dia. d		Dimension (in) (mm)								Bolt Size (in)	Bearing No.	Housing No.	Weight (lb)		
	(in.)	(mm)	H	J	L	A ₂	A ₁	A	E	N					S	
SBFL201G 201-8G 202G 202-10G 203G 203-11G	12											SB201G 201-8G 202G 202-10G 203G 203-11G	FL203	0.83		
	1/2	15	3-29/32	3-1/32	2-1/4	19/32	7/16	31/32	1-1/4	15/32	1/4					
	5/8	17	99	76.5	57	15	11	24.5	31	11.5	6.0					
	11/16															
SBFL204-12G 204G	3/4	20	4-15/32	3-9/16	2-3/8	19/32	7/16	1	1-5/16	15/32	9/32	3/8	SB204-12G 204G	FL204	0.86 0.82	
SBFL205-14G 205-15G 205G 205-16G	7/8											SB205-14G 205-15G 205G 205-16G	FL205	1.28 1.28 1.26 1.23		
	15/16	25	5-1/8	3-29/32	"2-11/16	5/8	17/32	1-1/16	1-13/32	15/32	5/16					
			130	99	68	16	13	27	35.5	11.5	7.5					
	1															
SBFL206-18G 206G 206-19G 206-20G	1-1/8	30	5-27/32	4-5/8	3-5/32	23/32	17/32	1-1/4	1-19/32	15/32	5/16	3/8	SB206-18G 206G 206-19G 206-20G	FL206	1.85 1.88 1.81 1.79	
	1-3/16		148	117	80	18	13	31	40	11.5	8.0					
	1-1/4															
SBFL207-20G 207-21G 207-22G 207G 207-23G	1-1/4											1/2	SB207-20G 207-21G 207-22G 207G 207-23G	FL207	2.99 2.97 2.33 2.27 2.24	
	1-5/16		6-11/32	5-1/8	3-9/16	3/4	9/16	1-11/32	1-11/16	9/16	11/32					
	1-3/8	35	161	130	90	19	14	34	42.5	14.0	8.5					
	1-7/16															
SBFL208-24G 208-25G 208G	1-1/2											1/2	SB208-24G 208-25G 208G	FL208	3.08 3.04 2.86	
	1-9/16	40	6-29/32	5-11/16	3-15/16	27/32	9/16	1-7/16	1-13/16	9/16	3/8					
			175	144	100	21	14	36	46	14.0	9.0					
SBFL209-26G 209-27G 209-28G 209G	1-5/8											5/8	SB209-26G 209-27G 209-28G 209G	FL209	4.33	
	1-11/16		7-13/32	5-27/32	4-1/4	7/8	5/8	1-1/2	2-3/32	23/32	13/32					
	1-3/4	45	188	148	108	22	16	38	53	18.0	10.2					
SBFL210-30G 210-31G 210G 210-32G	1-7/8											5/8	SB210-30G 210-31G 210G 210-32G	FL210	4.80	
	1-15/16	50	7-3/4	6-3/16	4-17/32	7/8	5/8	1-19/32	2-5/32	23/32	7/16					
			197	157	115	22	16	40	54.6	18.0	10.9					
	2															
SBFL211-32G 211-34G 211G 211-35G	2											5/8	SB211-32G 211-34G 211G 211-35G	FL211	6.69	
	2-1/8	55	8-13/16	7-1/4	5-1/8	1	23/32	1-11/16	2-5/16	23/32	15/32					
			224	184	130	25	18	43	58.5	18.0	11.8					
SBFL212-36G 212G 212-38G 212-39G	2-1/4											5/8	SB212-36G 212G 212-38G 212-39G	FL212	8.27	
		60	9-27/32	7-31/32	5-17/32	1-5/32	23/32	1-29/32	2-21/32	23/32	19/32					
	2-3/8		250	202	140	29	18	48	67.8	18.0	14.9					
	2-7/16															

* Full cover metal shroud seal standard. Full contact rubber seal (2RS suffix) optional.
Non-relubricatable units also available (remove G suffix). Contact factory.

