


Single Row-Sealed Spherical Roller Bearing

- Single row design offering increased load capacity
- Sealed to keep contamination out and lubricant in
- Dimensionally interchangeable with double row unsealed designs
- W33 Oil Hole & groove in OD

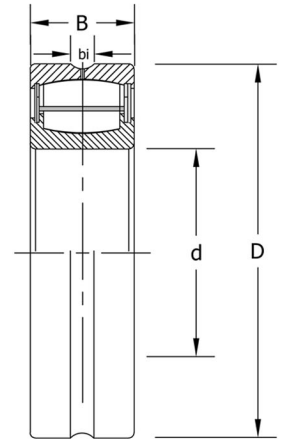

Bearing Designation	Boundary Dimensions (mm)			rsmin (in)	Load Ratings		Limiting Speeds (r/min) Grease	Weight (lbs)
	Straight Bore	d	D		B	Dynamic (Cr)		
SB22205/C3W33SS	25	52	18	.039	10340	9820	8550	.40
SB22206/C3W33SS	30	62	20	.039	11555	10970	7695	.64
SB22207/C3W33SS	35	72	23	.039	15197	14450	6460	.95
SB22208/C3W33SS	40	80	23	.039	16883	16000	5700	1.20
SB22209/C3W33SS	45	85	23	.039	17444	17095	5320	1.30
SB22210/C3W33SS	50	90	23	.039	18839	18450	4988	1.40
SB22211/C3W33SS	55	100	25	.059	23380	22691	4418	1.90
SB22212/C3W33SS	60	110	28	.059	27876	28999	3990	2.60
SB22213/C3W33SS	65	120	31	.059	34790	36192	3610	3.40
SB22214/C3W33SS	70	125	31	.059	35182	36800	3468	3.60
SB22215/C3W33SS	75	130	31	.059	36848	39000	3325	3.90
SB22216/C3W33SS	80	140	33	.079	41552	45707	3088	4.60
SB22217/C3W33SS	85	150	36	.079	49882	54800	2850	5.90
SB22218/C3W33SS	90	160	40	.079	58016	64000	2660	7.50
SB22219/C3W33SS	95	170	43	.079	69482	78100	2518	9.20
SB22220/C3W33SS	100	180	46	.079	76146	87400	2375	11.10
SB22222/C3W33SS	110	200	53	.079	98000	116600	2090	15.90
SB22224/C3W33SS	120	215	58	.079	117600	140606	1948	19.80

Tapered Bore configurations (K Suffix), special trashguard and high temp seal configurations are also available subject to production lead times and minimum quantities.

US Corporate Headquarters:
2100 Pacific Street,
Hauppauge NY, 11788



Email: sales@tritanpt.com
Phone: 800-645-5088
www.tritanpt.com