


TRITAN

PRECISION ROLLER CHAIN

YOUR LINK TO QUALITY.

PRECISION SINGLE STRAND ROLLER METRIC CHAIN

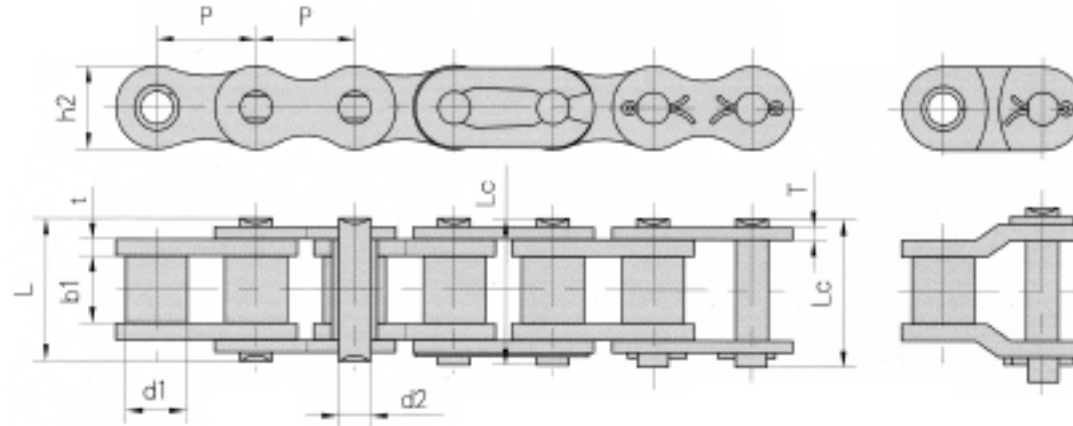

BS/ISO CHAIN NUMBER	PITCH P	ROLLER DIA. d1	WIDTH BETWEEN INNER PLATES b1	PIN DIA. d2	PIN LENGTH		INNER PLATE DEPTH h2	PLATE THICK- NESS t/T	ULTIMATE TENSILE STRENGTH Q	AVERAGE TENSILE STRENGTH Qo	WEIGHT PER FOOT q
					L	Lc					
					max	max					
04B-1R	6.000	4.000	2.800	1.850	6.800	7.800	5.00	0.600	3.000	3.200	0.110
05B-1R	8.000	5.000	3.000	2.310	8.200	8.900	7.10	0.800	5.000	5.900	0.200
06B-1R	9.525	6.350	5.720	3.280	13.150	14.100	8.20	1.300	9.000	10.400	0.410
08B-1R	12.700	8.510	7.750	4.450	16.700	18.200	11.80	1.600	18.000	19.400	0.690
10B-1R	15.875	10.160	9.650	5.080	19.500	20.900	14.70	1.700	22.400	27.500	0.930
12B-1R	19.050	12.070	11.680	5.720	22.500	24.200	16.00	1.850	29.000	32.200	1.150
16B-1R	25.400	15.880	17.020	8.280	36.100	37.400	21.00	4.14/3.1	60.000	72.800	2.710
20B-1R	31.750	19.050	19.560	10.190	41.300	45.000	26.40	4.5/3.5	95.000	106.700	3.700
24B-1R	38.100	25.400	25.400	14.630	53.400	57.800	33.20	6.0/4.8	160.000	178.000	7.100
28B-1R	44.450	27.940	30.990	15.900	65.100	69.500	36.70	7.5/6.0	200.000	222.000	8.500
32B-1R	50.800	29.210	30.990	17.810	66.000	71.000	42.00	7.0/6.0	250.000	277.500	10.250
40B-1R	63.500	39.370	38.100	22.890	82.200	89.200	52.96	8.5/8.0	355.000	394.000	16.350
48B-1R	76.200	48.260	45.720	29.240	99.100	107.000	63.80	12.0/10.0	560.000	621.600	25.000
56B-1R	88.900	53.980	53.340	34.320	114.600	123.000	77.80	13.5/12.0	850.000	940.000	35.780
64B-1R	101.600	63.500	60.960	39.400	130.000	138.500	90.170	15.0/13.0	1132.000	1240.000	46.000
72B-1R	114.300	72.390	68.580	44.480	147.400	156.400	103.600	17.0/15.0	1400.000	1550.000	60.800